



Преобразователь сигнала SINEAX VC604s

Архангельск (8182)63-90-72
 Астана (7172)727-132
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89
 Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Казань (843)206-01-48

Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Липецк (4742)52-20-81
 Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81

Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Пермь (342)205-81-47
 Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54

Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Тверь (4822)63-31-35
 Томск (3822)98-41-53
 Тула (4872)74-02-29
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Ярославль (4852)69-52-93

Единый адрес для всех регионов: cmn@nt-rt.ru || www.camille-bauer.nt-rt.ru

использовано с разрешения официального
дистрибутора АО «ЮЕ-Интернейшнл»

SINEAX VC604s

Programmable Safety Value Converter

for direct currents, direct voltages, temperature sensors, teletransmitters or potentiometers



SINEAX VC604s is a multifunctional transmitter for top-hat rail assembly with the following main characteristics:

- Measurement of DC voltage, DC current, temperature (RTD, TC) and resistance
- Sensor connection without any external jumpers
- 2 inputs (e.g. for sensor redundancy or difference formation)
- 1 output (U or I)
- 2 inputs can be linked with each other and allocated to the 2 outputs which enables calculations and sensor monitoring (e.g. prognostic maintenance of sensors).
- System capability: Communication via Modbus interface
- 2 freely programmable relays with changeover contacts, e.g. for limit or alarm signalling
- AC/DC wide-range power supply unit
- Pluggable high-quality screw or spring cage terminals



All settings of the instrument can be adapted to the measuring task by PC software. The software also serves visualising, commissioning and service.

Table 1: Input variables, measuring ranges

Type of measurement	Measuring range	Minimum span
DC voltage [mV]	-1000 ... 1000 mV	2 mV
DC voltage [V]	-300 ... 300 V	>1 V
DC current [mA]	-50 ... 50 mA	0.2 mA
Resistance [Ω]	0 ... 5000 Ω	8 Ω
RTD Pt100	-200 ... 850 °C	20 K
RTD Ni100	-60 ... 250 °C	15 K
TC Type B	0 ... 1820 °C	635 K
TC Type E	-270 ... 1000 °C	34 K
TC Type J	-210 ... 1200 °C	39 K

Type of measurement	Measuring range	Minimum span
TC Type K	-270 ... 1372 °C	50 K
TC Type L	-200 ... 900 °C	38 K
TC Type N	-270 ... 1300 °C	74 K
TC Type R	-50 ... 1768 °C	259 K
TC Type S	-50 ... 1768 °C	265 K
TC Type T	-270 ... 400 °C	50 K
TC Type U	-200 ... 600 °C	49 K
TC Type W5Re-W26Re	0 ... 2315 °C	135 K
TC Type W3Re-W25Re	0 ... 2315 °C	161 K

SINEAX VC604s

Programmable Safety Value Converter

Technical data

Measuring input 1 ➔

Direct voltage

Measuring range mV

For limits see table 1
 $R_i > 10 \text{ M}\Omega$,
 continuous overload max. $\pm 1200 \text{ mV}$

Measuring range V
 (only in corresponding device type)

For limits see table 1
 $R_i = 1.4 \text{ M}\Omega$,
 continuous overload max. $\pm 300 \text{ V}$

Direct current

Measuring range mA

For limits see table 1
 $R_i = 11 \Omega$,
 continuous overload max. $\pm 50 \text{ mA}$

Resistance thermometer RTD

Resistance measurement types

Pt100 (IEC 60751),
 adjustable Pt20...Pt1000
 Ni100 (DIN 43760),
 adjustable Ni50...Ni1000

Measuring range limits

See table 1

Wiring

2, 3 or 4-wire connection

Measuring current

0.2 mA

Line resistance

30Ω per line,
 in 2-wire connection adjustable or calibratable

Thermocouples TC

Thermocouples

Type B, E, J, K, N, R, S, T (IEC 60584-1)
 Type L, U (DIN 43760)
 Type W5Re-W26Re, W3Re-W25Re (ASTM E988-90)

Measuring range limits

See table 1

Cold junction compensation

Internal (with installed Pt100),
 with Pt100 on terminals or with external reference junction
 $-20 \dots 70^\circ\text{C}$

Resistance measurement, teletransmitter, potentiometer

Measuring range limits

See table 1

Wiring

2, 3 or 4-wire connection

Resistance teletransmitter

Type WF and WF DIN

Measuring current

0.2 mA

Line resistance

30Ω per line,
 in 2-wire connection adjustable or calibratable

Measuring input 2 ➔

Direct current

Measuring range mA

Same as measuring input 1

Direct voltage

Measuring range mV

Same as measuring input 1

Resistance thermometer RTD

Same as measuring input 1 except:

Wiring

2 or 3 wire connection

Thermocouples TC

Same as measuring input 1

Resistance measurement, teletransmitter, potentiometer

Same as measuring input 1 except:

Wiring 2 or 3 wire connection

Please note

The following device types are available:

a) VC604s with measuring input for 1x direct current [mA] and 1x high direct voltage [V]

The direct voltage [V] and direct current [mA] measuring methods can be allocated to Input 1 or Input 2 here.

b) VC604s with measuring input for 2x direct current [mA]

The different device types are firm and cannot be reprogrammed!

The measuring inputs 1 and 2 are galvanically connected. If 2 input sensors or input variables are used, observe combination options in Table 3 and circuit instructions contained in the operating instructions!

Analog output ➔

Direct current

Output range

$\pm 20 \text{ mA}$,
 range may be freely set

max. 12 V

$< 18 \text{ V}$

Adjustable, max. $\pm 22 \text{ mA}$

$< 50 \mu\text{A pp}$ (after low pass 10 kHz)
 $> 5 \text{ M}\Omega$

Direct voltage

Output range

$\pm 10 \text{ V}$,
 range may be freely set

max. 20 mA

Approx. 30 mA

Adjustable, max. $\pm 11 \text{ V}$

$< 20 \text{ mV pp}$ (after low pass 10 kHz)
 $< 2 \Omega$

Output settings

Limitation

Gain/offset trimming

Inversion

Relay contact outputs □%

Contact

1 pole, changeover contact

Switching capacity AC: $2 \text{ A} / 250 \text{ V}$

DC: $2 \text{ A} / 30 \text{ V}$

Bus/programming connection ↪

Interface, protocol

RS-485, Modbus RTU

Baudrate 9.6...115.2 kBaud, adjustable

SINEAX VC604s

Programmable Safety Value Converter

Transmission behaviour

Measured quantities
for the outputs

- Input 1
- Input 2
- Input 1 + input 2
- Input 1 – input 2
- Input 2 – input 1
- Input 1 · input 2
- Minimum value, maximum value or mean value of input 1 and input 2
- Sensor redundancy
Input 1 or input 2

Transmission functions

Linear, Absolute amount, scaling (gain/ offset), magnifier function (zoom)
user-specific via basic value table (24 basic values per measured variable)

Settling time:

Adjustable 1...30 s

Limit values and monitoring

Number of limit values
Measured variable for
the limit values

4

- Input 1
- Input 2
- Measured variable for outputs
- Input 1 – input 2
(e.g. drift monitoring in case of 2 sensors)
- Input 2 – input 1
(e.g. drift monitoring in case of 2 sensors)

Functions

Absolute value
Gradient dx/dt (e.g. temperature gradient monitoring)

Time delay
Signalling

Adjustable 0...3600 s
Relay contact, alarm LED, status 1, status 3

Sensor breakage and short circuit monitoring of measuring input

Signalling

Relay contact, alarm LED, status 1

Output value in case of a fault

Signalling to alarm LED

In case of a sensor error, the defective input (1 or 2) is signalled by the number of flashes of the alarm LED (1x or 2x).

In case of a failure at both inputs:
Alarm LED does not flash.

Other monitoring operations

Drift monitoring

Monitoring of measured value difference between 2 input sensors for a certain period of time (e.g. due to different sensor response times).

Sensor redundancy

If the limit value is exceeded for this time, an alarm is signalled.
(See limit values 1 and 2)

Measurement with 2 temperature sensors; if sensor 1 fails (fault) sensor 2 is activated for bridging (see measuring quantities for outputs)

Alarm signalling

Time delay
Alarm LED "ERR"

Relay contact

Output value
in case of a fault

Adjustable 0...60 s

With closed contact,
the yellow LED shines,
invertible alarmfunction

For sensor breakage and short circuit, value adjustable –10...110%

Power supply

Rated voltage UN	Tolerance
24...230 V DC	±15%
100...230 V AC, 50...400 Hz	±15%

Consumption 2.0 W resp. 5.5 VA

Displays at the instrument

LED	Color	Function
ON/ERR	green	Power on
	red	Alarm
	flashing	Communication active
1	yellow	Relay 1 on
2	yellow	Relay 2 on

Configuration, programming

Operation via PC software «CB-Manager»

Accuracies (according to EN/IEC 60770-1)

Reference conditions

Ambient temperature	23 °C ± 2 K
Power supply	24 V DC
Reference value	Span
Settings	Input 1: Direct voltage mV, 0...1000 mV Output 1: 4...20 mA, burden resistance 300 Ω Mains frequency 50 Hz, Setting time 1 s Input 2, output 2, relay, monitoring off resp. not active, for voltage output: range 0...10 V, burden resistance >1 MΩ
Installation position	Vertically, detached

SINEAX VC604s

Programmable Safety Value Converter

Basic accuracy

At reference conditions	$\pm 0.1\%$
<i>Other types of measurement and input ranges:</i>	
RTD Pt100, Ni100	$\pm 0.1\% \pm 0.2\text{ K}$
Resistance measurement	$\pm 0.1\% \pm 0.1\Omega$
TC Type K, E, J, T, N, L, U	$\pm 0.1\% \pm 0.4\text{ K}$, measuring value $> -100\text{ }^\circ\text{C}$
TC Type R, S	$\pm 0.1\% \pm 2.4\text{ K}$
TC Type B	$\pm 0.1\% \pm 2.4\text{ K}$, measuring value $> 300\text{ }^\circ\text{C}$
TC W5Re-W26Re, W3Re-W25Re	$\pm 0.1\% \pm 2.0\text{ K}$
DC voltage mV	$\pm 0.1\% \pm 0.015\text{ mV}$
DC voltage V	$\pm 0.1\% \pm 0.0045\text{ V}$
DC current mA	$\pm 0.1\% \pm 0.0015\text{ mA}$

Additional error (additive)

High range minimum value (Minimum value $> 40\%$ of maximum value):	$\pm 0.1\%$ of maximum value
Small output range	$\pm 0.1\% * (\text{reference range} / \text{new range})$
Cold junction compensation internal	$\pm 3\text{ K}$
Magnifier function	$\pm \text{Zoom factor} \times (\text{basic accuracy} + \text{additional error})$ Zoom factor = measured variable range / zoom range

Influencing factors

Ambient temperature	$\pm 0.1\%$ per 10 K at reference conditions other settings: basic accuracy and additional errors per 10 K
Long-term drift	$\pm 0.1\%$
Common mode influence	$\pm 0.01\%$

Ambient conditions

Operating temperature	$-25 \dots +55\text{ }^\circ\text{C}$
Storage temperature	$-40 \dots +70\text{ }^\circ\text{C}$
Relative humidity	$\leq 75\%$, no condensation
Range of utilisation	Internal room up to 2000 m above sea level

Installation details

Design	Top-hat rail housing U4 Flammability class V-0 according to UL 94
Dimensions	See dimensional drawing
Assembly	For snap-on fastening on top-hat rail (35 x 15 mm or 35 x 7.5 mm) according to EN 50022
Terminals	Pluggable, 2.5 mm ² Front plug spring terminal 1.5 mm ²
Weight	150 g

Product safety, regulations

Electromagnetic compatibility	EN 61000-6-2 / 61000-6-4
Ingress protection (acc. EN 60529)	Housing IP 40 terminal IP20
Electric design	Acc. EN 61010
Degree of pollution	2
Between power supply and all circuits and be- tween the measuring input (1 + 2) and all circuits	Reinforced insulation overvoltage category III Working voltage 300 V Test voltage 3.7 kV AC rms
Between output (1 + 2) and relay contact	Reinforced insulation overvoltage category II Working voltage 300 V Test voltage 2.3 kV AC rms
Between output (1 + 2) and the bus connection	Functional insulation Working voltage < 50 V Test voltage 0.5 kV AC rms
Environmental tests	EN 60068-2-1/-2/-3 EN 60068-2-27 Shock: 50g, 11ms, sawtooth, half-sine EN 60068-2-6 Vibration: 0.15mm/2g, 10...150Hz, 10 cycles

Electric connections

Circuit	Terminal	Remarks
Measuring input	1 to 8	See table 2
Output	9 (+), 13 (-)	
Relay contacts	nc com no relay 1 10 11 12 relay 2 14 15 16	In dead voltage condition nc and com are connected
Power supply	17 (+/-) 18 (-/)	Note polarity at DC
Bus/ programming con- nection	+, -, GND	Front plug

Programmable Safety Value Converter

Table 2: Connection of inputs

Please note: If 2 input sensors or input variables are used, observe combination options in Table 3 and circuit instructions contained in the operating instructions!

Type of measurement	Wiring	
	Input 1	Input 2
Direct voltage mV		
Thermocouple with external cold junction thermostat or internally compensated		
Thermocouple with Pt100 at the terminals at the same input		
Thermocouple with Pt100 at the terminals at the other input		
Resistance thermometer or resistance measurement 2-wire		
Resistance thermometer or resistance measurement 3-wire		
Resistance thermometer or resistance measurement 4-wire		

Type of measurement	Wiring	
	Input 1	Input 2
Resistance-teletransmitter WF		
Resistance-teletransmitter WF-DIN		
Direct voltage V (only in corresponding device type)		
Direct current mA (Input 2 only in corresponding device type)		

Table 3: Measuring method combination options

	Input 2 measuring method	U [mV] earthing	U [V] 1 earthing	I [mA] 1 TC ext. earthing	TC int. earthing	7,8 2,7,8 2,8 2,7,8 2,8 2,7,8 6,4	R 2L R 3L RTD 2L RTD 3L RTD 4L I [mA] 2
Input 1 measuring method	Terminals	7,8	6,4	5,4	7,8	7,8 2,7,8 2,8 2,7,8 2,8 2,7,8 6,4	R 2L R 3L RTD 2L RTD 3L RTD 4L I [mA] 2
U [mV] earthing	3,4	✓	✓	✓	✓	✓	✓
U [V] 1	6,4	✓	✓	✓	✓	✓	✓
I [mA]	5,4	✓	✓	✓	✓	✓	✓
TC ext. earthing	3,4	✓	✓	✓	✓	✓	✓
TC int. earthing	3,4	✓	✓	✓	✓	✓	✓
	1,3,4	✓		✓		✓	✓
R 2L	1,4	✓		✓		✓	✓
R 3L	1,3,4	✓		✓		✓	✓
R 4L	1,2,3,4	✓		✓			
RTD 2L	1,4	✓		✓		✓	✓
RTD 3L	1,3,4	✓		✓		✓	✓
WF	1,3,4	✓		✓		✓	✓
WF_DIN	1,3,4	✓		✓		✓	✓
RTD 4L	1,2,3,4	✓		✓			

1 Selectable only in device type 1x direct current [mA] and 1x high voltage [V]


2 Selectable only in device type 2x direct current [mA]

SINEAX VC604s


Programmable Safety Value Converter

Dimensional drawing

Screw terminals

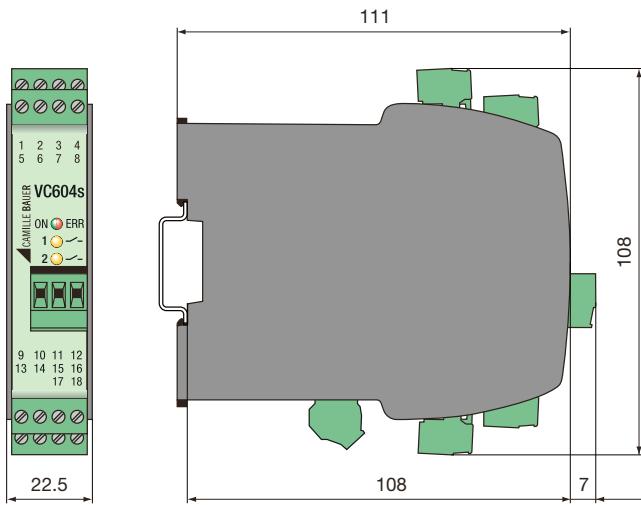

Spring cage terminals

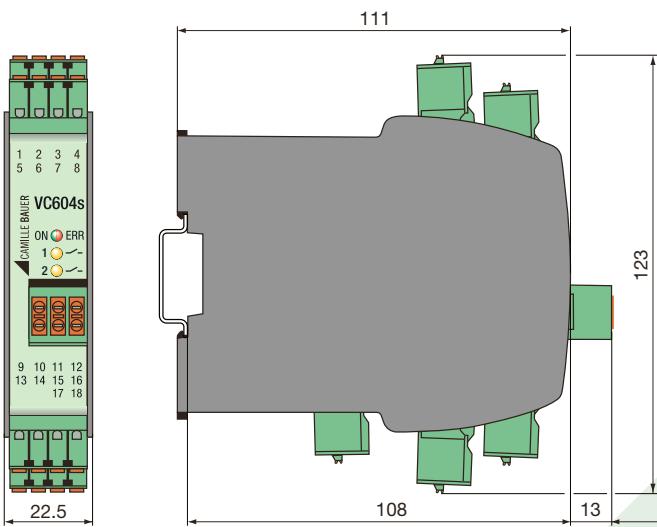

Ordering details

VC604s, Programmable	C604s
Features, Selection	
1. Mechanical design	
Top-hat rail housing	1
2. Version	
Standard with screw terminals	1
Standard with spring cage terminals	2
3. Climatic rating	
Standard climatic rating	1
4. Test certificate	
without test certificate	0
with test certificate German	D
with test certificate English	E
5. Configuration	G
Version without high DC input in basic configuration Contrary to the version for high voltages, mA signals can be processed at both inputs simultaneously in this version. In addition, mV, RTD, TC and resistance measurements are possible. Configured: Input 1: 4...20 mA / Input 2: 4...20 mA Output 1: 4...20 mA / Output 2: 4...20 mA	
Version for DC voltages up to 300V in basic configuration DC voltages up to 300V DC can be measured at one input. In addition, mV, RTD, TC and resistance measurements are possible at both inputs. mA at one input. Configured: Input 1: 0...1000 mV DC / Input 2: not used Output 1: 4...20 mA / Output 2: not used	S

Scope of supply

1 SINEAX VC604s
1 Safety Instructions 170 217
1 Software and Docu-CD 156 027

Accessories

USB-RS485 converter
(for programming the VC604s) Article No. 163 189

Please note:

This are two hardware platforms.
A SINEAX VC604s with high DC Voltage cannot be configured to 2 x mA inputs afterwards, just as a SINEAX VC604s with 2 x mA cannot measure a high DC Voltage.

 **CAMILLE BAUER**
Rely on us.

По вопросам продажи и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81

Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54


Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Единый адрес для всех регионов: cmn@nt-rt.ru || www.camille-bauer.nt-rt.ru

PROCESS CONTROL ENGINEERING



ANGULAR POSITION ENGINEERING

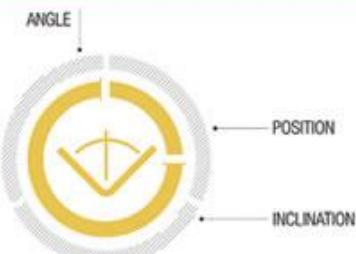

HEAVY CURRENT ENGINEERING

