

Преобразователь температуры SINEAX V608

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81

Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54

Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Единый адрес для всех регионов: cmn@nt-rt.ru || www.camille-bauer.nt-rt.ru

использовано с разрешения официального
дистрибьютора АО «ЮЕ-Интернейшл»

SINEAX V 608, Programmable Two-wire Temperature Transmitter for RTD and TC Inputs

for rail mounting in housing K17



Application

SINEAX V 608 is a two-wire transmitter. It is designed for **measuring temperature in combination with thermocouples or resistance thermometers**. Thermocouple non-linearities are automatically compensated. The output signal is a current in the range 4...20 mA.

The input variable and measuring range are programmed with the aid of a PC and the corresponding software.

The sensor circuit is monitored for open and short-circuits and the output responds in a defined manner if one is detected.

The power supply (12...30 V DC) is connected together with the signal by the two leads connected to the measurement output (loop powered).

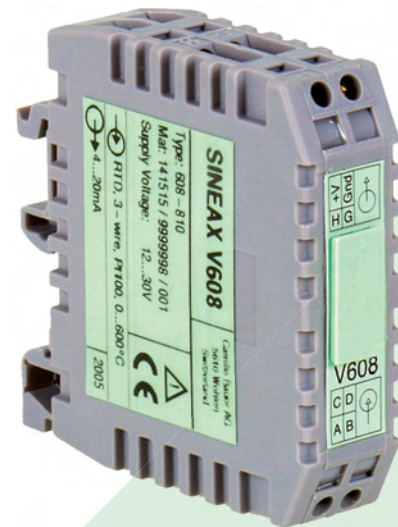


Fig. 1. Measuring transmitter SINEAX V 608 in housing K17.

Features / Benefits

- **Input variable and measuring range programmed using PC / Simplifies project planning and engineering, short delivery times, low stocking levels**

Measured variables	Measuring ranges		
	Limits	Min. span	Max. span
Temperatures with resistance thermometers for two, three or four wire connection			
Pt100, IEC 60 751	- 200 to 850 °C	50 K	850 K
Ni100, DIN 43 760	- 60 to 250 °C	50 K	250 K
Temperatures with thermocouples			
Type B, E, J, K, N, R, S, T acc. to IEC 60 584-1	acc. to type	2 mV	80 mV
Type L and U, DIN 43 710			
Type W5 Re/W26 Re Type W3 Re/W25 Re acc. to ASTM E 988-90			

- **Two-wire transmitter for installation in the process environment**
- **Open and short-circuit sensor circuit supervision / Defined output response should the supervision pick-up**
- **Programmable with or without power supply connection**
- **Compact design / Makes maximum use of available space**
- **Available in type of protection "Intrinsic safety" EEx ia IIC T6 (see "Table 5: Data on explosion protection")**

Standard versions

The following versions are available as standard versions already programmed for the **basic** configuration. It is only necessary to quote the **Order No.:**

Table 1:

Version	Cold junction compensation	Order Code	Order No.
Standard, not electrically isolated	incorporated	608-810	141 515
EEx ia IIC T6, not electrically isolated		608-830	141 523

Please complete the Order Code 608-8.1. according to "Table 3: Specification and ordering information" for versions with user-specific input ranges.

Basic configuration:

Measuring input	Pt 100 for three -wire connection
Measuring range	0 ... 600 °C
Measuring output	4 ... 20 mA, linearised with temperature
Open-circuit supervision	Output 21.6 mA
Response time	Approx. 1.5/2 s (Table 2)
Mains ripple suppression	For frequency 50 Hz

SINEAX V 608, Programmable Two-wire Temperature Transmitter for RTD and TC Inputs

Programming

A PC, the programming cable PK 610 plus ancillary cable and the programming software V 600 *plus* are required to program the transmitter. (Details of the programming cable and the software are in be found in the separate data sheet: PK 610 Le.)

The connections between "PC ↔ PK 610 ↔ SINEAX V 608" can be seen from Fig. 2. The transmitter can be programmed either with or without the power supply connected.

The software V 600 *plus* is supplied on one CD and runs under Windows 3.1x, 95, 98, NT and 2000.

The programming cable PK 610 adjusts the signal level between the PC and the transmitter SINEAX V 608.

The programming cable PK 610 is used for programming both standard and Ex versions.

It is possible to programme the temperature transmitter installed into the hazardous area.

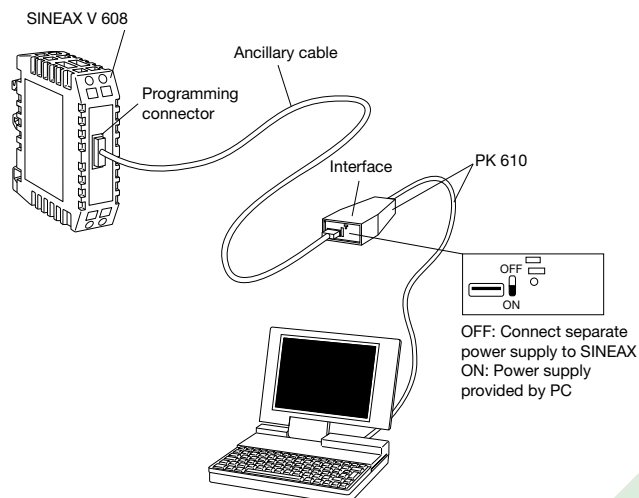


Fig. 2. Example of the set-up for programming a SINEAX V 608 without the power supply. For this case the switch on the interface must be set to "ON".

Technical data

Measuring input →

Temperature with resistance thermometers

Measuring range limits:	See table 4
Resistance types:	Type Pt 100 (IEC 60 751) Type Ni 100 (DIN 43 760) other sensor types configurable
Measuring current:	≤ 0.20 mA
Standard circuit:	1 resistance thermometer for two-, three- or four-wire connection
Input resistance:	$R_i > 10 \text{ M}\Omega$
Lead resistance:	≤ 30 Ω per lead

Temperature with thermocouple

Measuring range limits:	See Table 4
Thermocouple pairs:	Type B: Pt30Rh-Pt6Rh (IEC 584) Type E: NiCr-CuNi (IEC 584) Type J: Fe-CuNi (IEC 584) Type K: NiCr-Ni (IEC 584) Type L: Fe-CuNi (DIN 43710) Type N: NiCrSi-NiSi (IEC 584) Type R: Pt13Rh-Pt (IEC 584) Type S: Pt10Rh-Pt (IEC 584) Type T: Cu-CuNi (IEC 584) Type U: Cu-CuNi (DIN 43710) Type W5 Re/W26 Re (ASTM) Type W3 Re/W25 Re (E 988-90)

Standard circuit:	1 thermocouple, internal cold junction compensation with built-in Pt 100 or 1 thermocouple, external cold junction compensation
-------------------	---

Input resistance: $R_i > 10 \text{ M}\Omega$

Cold junction compensation:


Internal:	Internal or external With built-in Pt 100 or with Pt 100 connected to the terminals
External:	Via cold junction thermostat 0 ... 60 °C, configurable

Measuring output →

Output signal I_A :	(output/powering circuit) Impressed DC current, linear with temperature
Standard range:	4...20 mA, 2-wire technique

External resistance (load):

$$R_{\text{ext}} \text{ max. [k}\Omega\text{]} = \frac{\text{Power supply [V]} - 12 \text{ V}}{\text{Max. output current [mA]}}$$

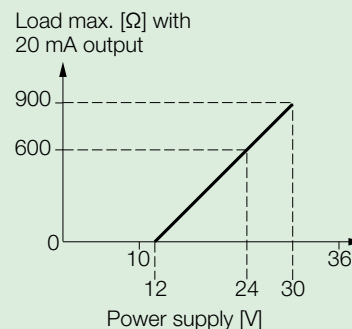

Residual ripple in output current: < 1% p.p.

SINEAX V 608, Programmable Two-wire Temperature Transmitter for RTD and TC Inputs

Table 2: Response time

Measuring mode	Open sensor circuit	Short-circuit	Possible response times approx. [s]						
			*)	Option					
TC int. comp.	aktive	—	1.5	2.5	3.5	6.5	11	20.5	40
TC int. comp.	off	—	1.5	2.5	3.5	6.5	13.5	24.5	49.5
TC ext. comp.	aktive	—	1.5	2.5	3.5	6.5	11	20.5	40
TC ext. comp.	off	—	1.5	2.5	4	6.5	13.5	24.5	48.5
RTD 2L	aktive	—	2	2.5	3	5	9.5	17.5	33.5
RTD 3L, 4L	aktive	aktive	2	2.5	4	6.5	11.5	21	40.5
RTD 2L,3L,4L	off	off	1.5	2.5	3.5	7.5	14	26.5	50.5

*) Standard values, also valid for basic configuration

Programming connector

Interface: Serial interface

Accuracy data (acc. to EN/IEC 60 770-1)

Reference value: Measuring span

Basic accuracy: Error limits $\leq \pm 0.2\%$ at reference conditions

Reference conditions

Ambient temperature 23 °C
 Power supply 18 V DC
 Output burden 250 Ω
 Settings Pt100, 3-wire, 0...600 °C

Additional errors (additive)

Low measuring ranges

Voltage measurement $\pm 5 \mu\text{V}$
 at measuring spans $< 10 \text{ mV}$

Resistance thermometer $\pm 0.3 \text{ K}$
 at measuring spans $< 400 \text{ }^\circ\text{C}$

Thermocouple
 Type U, T, L, J, K, E $\pm 0.1 \text{ K}$
 at measuring spans $< 200 \text{ }^\circ\text{C}$
 Type N $\pm 0.13 \text{ K}$
 at measuring spans $< 320 \text{ }^\circ\text{C}$
 Type S, R $\pm 0.42 \text{ K}$
 at measuring spans $< 1000 \text{ }^\circ\text{C}$
 Type B $\pm 0.6 \text{ K}$
 at measuring spans $< 1400 \text{ }^\circ\text{C}$

High initial value (Additional error =
 Factor · initial value)

Voltage measurement $\pm 0.1 \mu\text{V} / \text{mV}$

Resistance thermometer $\pm 0.00075 \text{ K} / \text{ }^\circ\text{C}$

Thermocouple
 Type U, T, L, J, K, E $\pm 0.0006 \text{ K} / \text{ }^\circ\text{C}$
 Type N $\pm 0.0008 \text{ K} / \text{ }^\circ\text{C}$
 Type S, R $\pm 0.0025 \text{ K} / \text{ }^\circ\text{C}$
 Type B $\pm 0.0036 \text{ K} / \text{ }^\circ\text{C}$

Influence of lead resistance
 at resistance thermometer $\pm 0.01\%$ per Ω

Internal cold junction
 compensation $\pm 0.5 \text{ K}$

Linearisation $\pm 0.3\%$

Influencing factors

Temperature $\leq \pm (0.15\% + 0.15 \text{ K})$ per 10 K with
 temperature measurement
 $\leq \pm (0.15\% + 12 \mu\text{V})$ per 10 K with
 voltage measurement

Power supply influence
 (power supply on terminals) $\leq \pm 0.005\%$ per V

Long-time drift $\leq \pm 0.1\%$

Common and transverse
 mode influence $\leq \pm 0.2\%$

Open and short-circuit sensor circuit supervision

Signalling modes: Output signal programmable to
 ... the value the output had im-
 mediately prior to the open or
 short-circuit (hold value)
 ... a value between
 4 and 21.6 mA

Power supply

DC voltage: Supply
 12...30 V DC
 max. residual ripple 1% p.p.
 (supply must not fall below 12 V)
 Protected against wrong polarity

Installation data

Housing: Housing K17 for rail mounting
 Dimensions see section "Dimensio-
 nal drawings"

Material of housing: Polyamide
 Flammability Class V2 acc. to UL
 94, self-extinguishing, non-dripping,
 free of halogen

Mounting: For snapping
 – onto rail G
 acc. to EN 50 035 – G32
 or
 – onto top-hat rail
 acc. to EN 50 022 (35 x 15 mm
 or 35 x 7.5 mm)

Standards

Electromagnetic
 compatibility: The standards EN 50 081-2 and
 EN 50 082-2 are observed

Intrinsically safe: Acc. to EN 50 020

Protection (acc. to IEC 529
 resp. EN 60 529): Housing IP 40
 Terminals IP 20

SINEAX V 608, Programmable Two-wire Temperature Transmitter for RTD and TC Inputs

Electrical standards:	Acc. to IEC 1010 resp. EN 61 010	Storage temperature range:	-40 to +80 °C
Ambient conditions		Annual mean relative humidity:	≤ 75%, no moisture condensation
Climatic rating:	IEC 60 068-2-1/2/3		
Ambient temperature range:	-25 to +80 °C at NEx and Ex (T4) at Ex (T6) dependent of Pi, see EC-type-examination Certificate		

Table 3: Specification and ordering information (see also Table 1: Standard versions)

Description	*Blocking code	No-go with blocking code	Article No./ Feature
SINEAX V 608			608 –
Order Code V 608 - xxxx xxxx xxx			
Features, Selection			
1. Housing Housing K17 for rail mounting			8
2. Version Standard, not electrically isolated			1
EEx ia IIC T6, not electrically isolated			3
3. Configuration Basic configuration, programmed (Pt100, three-wire, 0 ... 600 °C) All types with basic configuration are available as standard versions, see table 1, specification complete! Programmed to order The following features 4 to 11 must be fully specified!	G		0
			1
4. Measuring unit Temperatures in °C			1
Temperatures in °F		G	2
Temperatures in K		G	3
5. Measuring mode, input connection Thermocouple Internal cold junction compensation, with built-in Pt100	T	G	1
External cold junction compensation t_k []	T	G	2
Specify external cold junction temperature t_k (in °C, °F or K, acc. to specification in Feature 4) any value between 0 and 60 °C or equivalent			
Resistance thermometer Two-wire connection, R_L [Ω] []	R	G	3
Specify total lead resistance R_L [Ω], any value between 0 and 60 Ω			
Three-wire connection, $R_L \leq 30 \Omega/\text{wire}$	R		4
Four-wire connection, $R_L \leq 30 \Omega/\text{wire}$	R	G	5
6. Sensor type / measuring range Sensor type / beginning ... end value of measuring range			
RTD PT 100 Range []		T	1
RTD Ni 100 Range []		GT	2
RTD Pt ... [Ω] Range []		GT	3
RTD Ni ... [Ω] Range []		GT	4

SINEAX V 608, Programmable Two-wire Temperature Transmitter for RTD and TC Inputs

Description	*Blocking code	No-go with blocking code	Article No./ Feature
SINEAX V 608 Order Code V 608 - xxxx xxxx xxx			608 –
Features, Selection			
6. Sensor type / measuring range (continuation)			
Sensor type / beginning ... end value of measuring range			
TC Type B	Range		GR B
TC Type E	Range		GR E
TC Type J	Range		GR J
TC Type K	Range		GR K
TC Type L	Range		GR L
TC Type N	Range		GR N
TC Type R	Range		GR R
TC Type S	Range		GR S
TC Type T	Range		GR T
TC Type U	Range		GR U
TC W5-W26Re	Range		GR W
TC W3-W25Re	Range		GR X
Specify measuring range in [°C], [°F] or [K]; refer to table 4 for the operating limits for each type of sensor. Lines 3 and 4: Specify resistance in Ω at 0 °C, any value between 50 and 4000 Ω			
7. Output characteristic			
Standard 4 ... 20 mA			
Inversely 20 ... 4 mA			
8. Open and short-circuit sensor signalling			
Output response for an open or short-circuit* sensor			
Output 21.6 mA			
Output (any value between 4 and < 21.6 mA)	[mA]		G 1
Hold output at last value			
No signal			
* The short-circuit signal is only active for the RTD measuring mode $\geq 100 \Omega$ at 0 °C and three or four-wire connection			
9. Output time response			
Standard setting time approx. 2 s			
Setting time (admissible values see Table 2)	[s]		G 9
10. Mains ripple suppression			
Frequency 50 Hz			
Frequency 60 Hz			
11. Test certificate			
Without test certificate			
Test certificate in German			
Test certificate in English			

*Lines with letter(s) under "no-go" cannot be combined with preceding lines having the same letter under "SCODE".

SINEAX V 608, Programmable Two-wire Temperature Transmitter for RTD and TC Inputs

Table 4: Temperature measuring ranges

Measuring ranges [°C]	Resistance thermometers		Thermocouples											
	Pt100	Ni100	B	E	J	K	L	N	R	S	T	U	C ¹⁾	D ²⁾
0 ... 40	X			X	X		X							
0 ... 50	X	X		X	X	X	X				X	X		
0 ... 60	X	X		X	X	X	X				X	X		
0 ... 80	X	X		X	X	X	X	X			X	X		
0 ... 100	X	X		X	X	X	X	X			X	X		
0 ... 120	X	X		X	X	X	X	X			X	X		
0 ... 150	X	X		X	X	X	X	X			X	X	X	
0 ... 200	X	X		X	X	X	X	X			X	X	X	X
0 ... 250	X	X		X	X	X	X	X			X	X	X	X
0 ... 300	X			X	X	X	X	X	X	X	X	X	X	X
0 ... 400	X			X	X	X	X	X	X	X	X	X	X	X
0 ... 500	X			X	X	X	X	X	X	X		X	X	X
0 ... 600	X			X	X	X	X	X	X	X		X	X	X
0 ... 800	X		X	X	X	X	X	X	X	X			X	X
0 ... 900			X	X	X	X	X	X	X	X			X	X
0 ... 1000			X	X	X	X		X	X	X			X	X
0 ... 1200			X		X	X		X	X	X			X	X
0 ... 1500			X						X	X			X	X
0 ... 1600			X						X	X			X	X
0 ... 1800			X										X	X
0 ... 2000													X	X
50 ... 150	X	X		X	X	X	X	X			X	X		
100 ... 300	X			X	X	X	X	X			X	X	X	X
200 ... 500	X			X	X	X	X	X	X	X		X	X	X
300 ... 600	X			X	X	X	X	X	X	X		X	X	X
600 ... 900			X	X	X	X	X	X	X	X			X	X
600 ... 1000			X	X	X	X		X	X	X			X	X
900 ... 1200			X		X	X		X	X	X			X	X
600 ... 1600			X						X	X			X	X
600 ... 1800			X										X	X
-10 ... 40	X	X		X	X	X	X					X		
-30 ... 60	X	X		X	X	X	X	X			X	X		
Measuring range limits [°C]	-200 to 850	-60 to 250	0 to 1820	-270 to 1000	-210 to 1200	-270 to 1372	-200 to 900	-270 to 1300	-50 to 1769	-50 to 1769	-270 to 400	-200 to 600	0 to 2315	0 to 2315
	ΔR min. 15 Ω at final value ³⁾ $\leq 400 \Omega$ ΔR min. 150 Ω at final value $> 400 \Omega$ max. final value 4000 Ω $\frac{\text{initial value}}{\Delta R} \leq 10$		ΔU min 2 ΔR , max. 80 mV $\frac{\text{Initial value}}{\Delta U} \leq 10$											

¹⁾ W5 Re W26 Re (ASTM E 988-90)

²⁾ W3 Re W25 Re (ASTM E 988-90)

³⁾ For two-wire connection, the final value is made up of the measured final value [Ω] plus the total resistance of the leads.

SINEAX V 608, Programmable Two-wire Temperature Transmitter for RTD and TC Inputs



Table 5: Data on explosion protection  **II 2 (1) G**

Order code	Type of protection Marking	Electrical data cc. to Certificate		Certificate	Mounting location
		Sensor input	Output		
608-83	EEx ia IIC T6	$U_o = 6\text{ V}$ $I_o = 15\text{ mA}$ $P_o = 39\text{ mW}$ $C_o = 990\text{ nF}$ $L_o = 5\text{ mH}$	$U_i = 30\text{ V}$ $I_i = 160\text{ mA}$ $P_i = \text{max. } 1\text{ W}^*$ $C_i = 0$ $L_i = 0$	EC-type-examination Certificate ZELM 01 ATEX 0052	Within the hazardous area, zone 1 and 2**

* Ambient temperature Ex: $-25\text{ °C} \dots \text{max. } 57\text{ °C}$ (dependent on P_i , see EC-type-examination Certificate)

** It is permissible for the sensor circuit to enter Zone 0, however, EN 50 284 and any applicable national standards must be observed.

Table 6: Accessories and spare parts

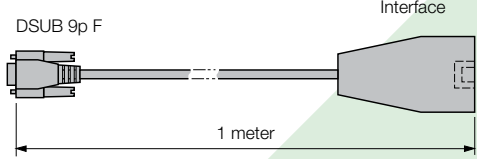
Description	Order No.
Programming cable PK 610 	137 887
Ancillary cable SINEAX Type V 608 	141 416
Configuration Software V 600 plus for SINEAX V 608, VK 616 and V 624 Windows 3.1x, 95, 98, NT and 2000 on CD in German, English, French, Spanish, Italian and Dutch In addition, the CD contains all configuration programmes presently available for Camille Bauer products	146 557
Operating Instructions V 608-8 Bd in German	141 953
Operating Instructions V 608-8 Bf in French	142 068
Operating Instructions V 608-8 Be in English	142 117

Standard accessories

- 1 Operating Instructions in German, French and English
- 1 Type examination certificate (only for "intrinsically safe" explosion-proof devices)

SINEAX V 608, Programmable Two-wire Temperature Transmitter for RTD and TC Inputs

Electrical connections

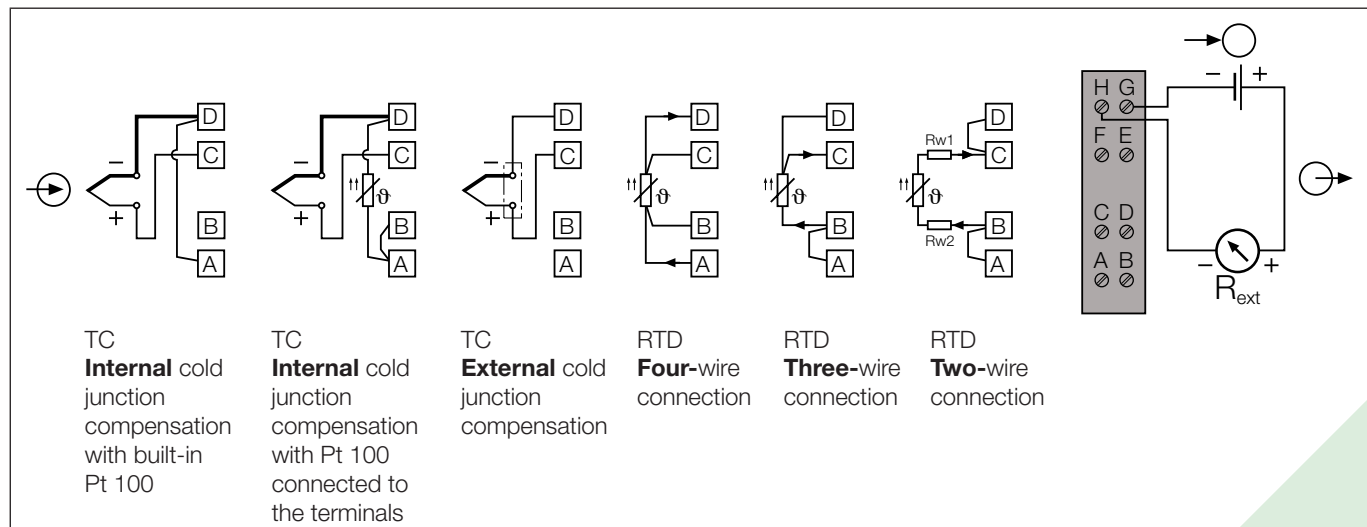

⊕ = Measuring input

⊕ = Two-wire measuring output (measuring circuit, 4 ... 20 mA signal)

⊕ = Power supply 12 ... 30 V DC

Dimensional drawings

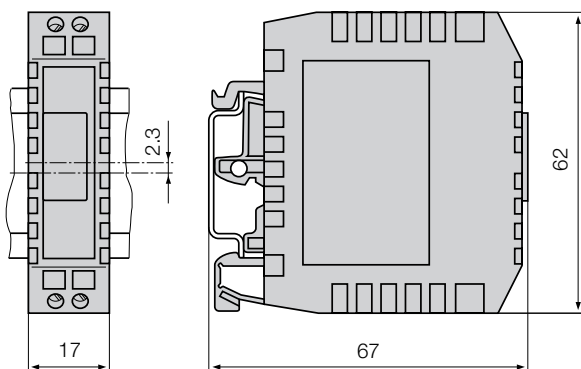


Fig. 3. SINEAX V 608 in housing **K17** clipped onto a top-hat rail EN 50 022 – 35 x 7.5.

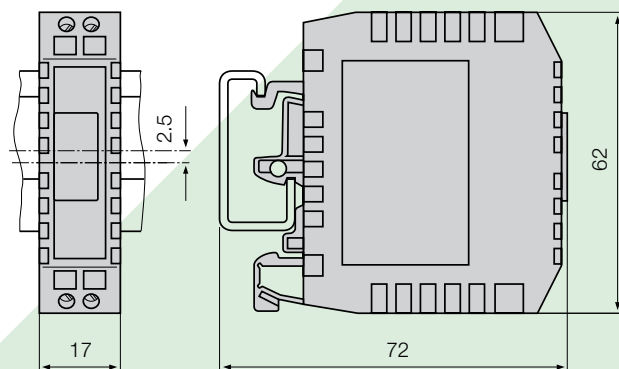


Fig. 4. SINEAX V 608 in housing **K17** clipped onto a rail "G" EN 50 035 – G32.

CAMILLE BAUER
Rely on us.

По вопросам продажи и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48



Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81

Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54


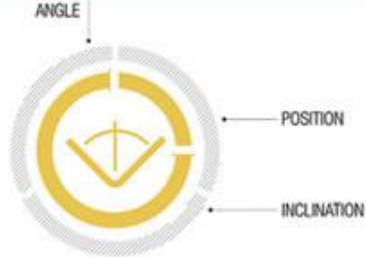
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Единый адрес для всех регионов: cmn@nt-rt.ru || www.camille-bauer.nt-rt.ru

PROCESS CONTROL ENGINEERING

ANGULAR POSITION ENGINEERING

HEAVY CURRENT ENGINEERING

